


PROLINK®

Challenge The Limit

PC 600

Interactive UPS For PC

Multiple Plugs

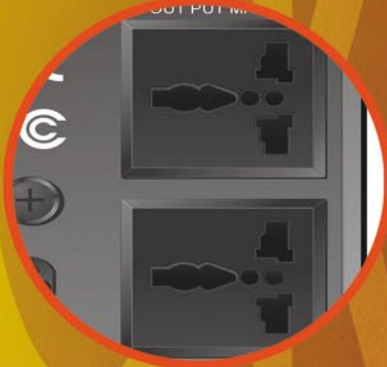

Audible & Visual
LED Indicators



- Battery Backup Function when Voltage Fluctuation or Utility Disconnected • 100% Backup Guarantee
- Quick Twinkling Response & Compatible with Generator • Aptitude Battery Application and Automatic Charge
- Convenient Installation • 100% Stabilized Output Power • Surge Voltage Suppression & Noise Filtration
- 500VA Capacity Level • Automatic Self Detection • Usage of High Quality Battery • Spare Investment

PROLINK®

Challenge The Limit

PC 600

Interactive UPS For PC



Features & Benefits

Self Protection

PC 600 is designed with the intelligent self protection design, therefore when the UPS is short circuited or battery voltage is low, it will be switched off automatically.

Automatic Self Detection

When the UPS is switched on, it will immediately check the status of the inverter, battery and load to identify any problems before they cause any unnecessary damages or losses.

High Quality Battery

PROLINK uses maintenance free sealed lead-acid batteries and float charging technology to give maximum battery services and minimum operation cost.

Compatible with Generators

PC 600 supports power input from various power generation

Automatic Charging

UPS is operating on the inverter mode when utility power is being interrupted. It will automatically shut down when the battery is discharged to the low limit. UPS will resume to operation automatically after the utility power is recovered.

Specifications

Capacity Level: 500VA
 Rated Input Voltage: 175VAC - 260VAC
 Rated Input Frequency: 50Hz \pm 1Hz or 60Hz \pm 1Hz
 Transfer Voltage: 175V
 Transfer Time: 2ms (max)
 Power Factor: 0.7
 Inverter Output Voltage: 220VAC (Typical)
 Inverter Output Frequency: 50Hz \pm 0.5Hz or 60Hz \pm 0.5Hz
 Inverter Output Waveform: Square Wave
 Running Temperature: 0-40°C
 Relative Humidity: 0-95% Non-Condensing
 Dimension: 162 x 94 x 320mm
 Net Weight/Gross Weight: 5.6kg/6Kg

Audible and Visual LED Indications

LED	Buzzer	UPS Status
Orange LED ON	No Beep	Utility normal, charging battery
Green, Orange LED ON	No Beep	Utility normal, utility supply the load
Red LED ON	Slow Beep	Utility abnormal, UPS supply the load
Red LED ON	Quick Beep	Utility abnormal, battery voltage low
Red LED ON	Long Beep	Battery voltage low, UPS is to be cut off
No LED ON	No Beep	UPS discharged to be cut off

*Specifications are subjected to change without prior notice

Singapore

FIDA INTERNATIONAL (S) PTE LTD

Blk 105 Boon Keng Road #06-11/13

Kallang Basin Industrial Estate

Singapore 339776

Tel: (65) 6392 5567 Fax: (65) 6392 5455

Website: www.fida.com

Malaysia

FIDA SYSTEMS (M) SDN BHD

29 USJ 1/31

47600 Subang Jaya Selangor

Darul Ehsan Malaysia

Tel: (603) 8024 9151 Fax: (603) 8024 9161

Website: www.fida.com

<http://www.fida.com>

PROLINK is manufactured under the authority of **FIDA INTERNATIONAL (S) PTE LTD**



All brand or product names are trademark or trademarks of their respective owners
© Copyright 2004 PROLINK All Rights Reserved

Online Technical Support
support@fida.com

Free Lifetime Telephone
Technical Support

9am - 5.45pm (Mon-Fri)
9am - 1pm (Sat)

Closed on Sundays & Public Holidays
Tel: (65) 6392 5567 (SINGAPORE)
Tel: (603) 8024 9151 (MALAYSIA)